

- ✓ high quality wands
- ✓ nozzle guard included
- ✓ connection for: 1/8" NPTF nozzle or G3/8" M ceramic nozzle
- ✓ multiple lengths
- ✓ tough design
- ✓ high quality machining
- ✓ PU wand grip
- ✓ ready to use


Technical Data

| | |
|--------------------------|---------------------|
| Pressure | 4000 psi (27.5 MPa) |
| Temperature | 250°F |
| Nominal width | 1/4" |
| Throughput medium | pH 3 - 12 |




LAN

| Part No. | L1 | L2 | G1 | WS | DG | IN | OUT |
|----------|-----|-----|----------|-----|-----|-----------|---------------------|
| 26.980 | 8" | 20" | straight | --- | --- | 1/4" NPTM | G3/8" M + 1/8" NPTF |
| 26.981 | 8" | 20" | bent | --- | --- | 1/4" NPTM | G3/8" M + 1/8" NPTF |
| 26.982 | 32" | 41" | straight | --- | --- | 1/4" NPTM | G3/8" M + 1/8" NPTF |
| 26.983 | 32" | 41" | bent | --- | --- | 1/4" NPTM | G3/8" M + 1/8" NPTF |

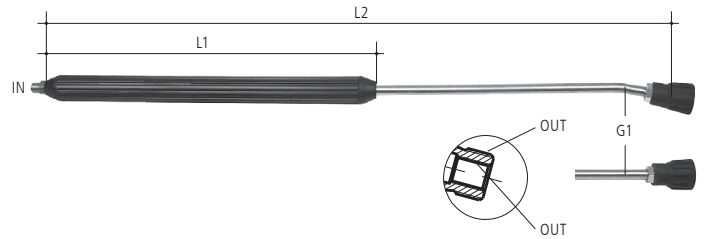

LAN-Eco

| Part No. | L1 | L2 | G1 | WS | DG | IN | OUT |
|----------|-----|-----|----------|-----|-----|---------|-----------|
| 28.520 | 12" | 24" | straight | --- | --- | G3/8" F | 1/4" NPTF |
| 28.521 | 12" | 24" | bent | --- | --- | G3/8" F | 1/4" NPTF |
| 28.522 | 12" | 24" | straight | yes | --- | G3/8" F | 1/4" NPTF |
| 28.523 | 12" | 24" | bent | yes | --- | G3/8" F | 1/4" NPTF |
| 28.524 | 12" | 24" | straight | yes | yes | G3/8" F | 1/4" NPTF |
| 28.525 | 12" | 24" | bent | yes | yes | G3/8" F | 1/4" NPTF |
| 28.530 | 24" | 39" | straight | --- | --- | G3/8" F | 1/4" NPTF |
| 28.531 | 24" | 39" | bent | --- | --- | G3/8" F | 1/4" NPTF |
| 28.532 | 24" | 39" | straight | yes | --- | G3/8" F | 1/4" NPTF |
| 28.533 | 24" | 39" | bent | yes | --- | G3/8" F | 1/4" NPTF |
| 28.534 | 24" | 39" | straight | yes | yes | G3/8" F | 1/4" NPTF |
| 28.535 | 24" | 39" | bent | yes | yes | G3/8" F | 1/4" NPTF |

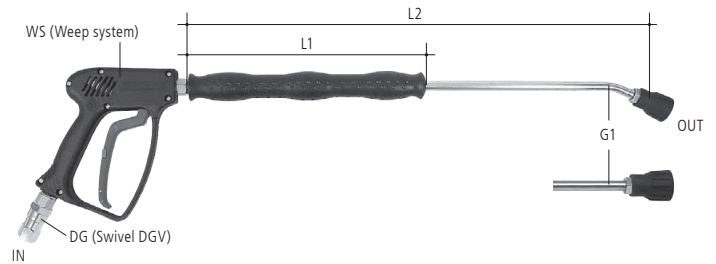

Appropriate nozzles see page 104


Accessories & Spare Parts see page 105

Legend

M.. = metric thrust, ..M = male, F = female, G = gas pipe thrust, QV = quick connects, SV = profile ring fitting
 D = diameter, k = conical, L = length, NW = nominal width, SW = wrench size, IN = media input, OUT = media output, RS = basic position

Assemble your personal MOSMATIC wand. Define inlet, outlet and the desired properties.

Just follow steps 1, 2 + 3 to find the right part number.

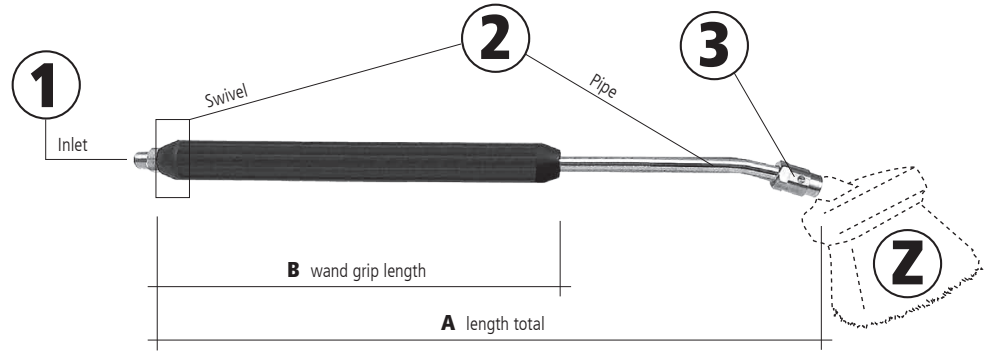

| 1 | Inlet | No. |
|---|-------------|-----|
| | M21 x 1.5 F | 21. |
| | M22 x 1.5 F | 22. |
| | 3/8" NPTM | 25. |
| | 1/4" NPTM | 26. |

| 2 | Pipe straight | | Pipe bent | |
|--------------------------------------|---------------|-----|----------------|-------------|
| | | | without Swivel | with Swivel |
| | A | B | No. | No. |
| Other versions or sizes upon request | 10" | 8" | 01 | 41 |
| | 14" | 8" | 02 | 42 |
| | 20" | 8" | 03 | 43 |
| | 26" | 16" | 04 | 44 |
| | 30" | 16" | 05 | 45 |
| | 34" | 16" | 06 | 46 |
| | 34" | 32" | 07 | 47 |
| | 38" | 16" | 08 | 48 |
| | 38" | 32" | 09 | 49 |
| | 41" | 16" | 10 | 50 |
| | 41" | 32" | 11 | 51 |
| | 50" | 40" | 12 | 52 |
| | 60" | 51" | 13 | 53 |
| | 70" | 51" | 14 | 54 |
| | 80" | 72" | 15 | 55 |

Your Part No.



| 3 | Outlet | No. |
|---|---|-----|
| | Nozzle socket 1/8" NPTF for locking-screw | 0 |
| | Nozzle socket 1/8" NPTF for snap-lock | 1 |
| | Nozzle socket 1/4" NPTF for locking-screw | 2 |
| | Nozzle socket 1/4" NPTF for snap-lock | 3 |
| | G1/4" kM (k=conical) | 4 |
| | Foam injector D0.1" G1/4" kM (k=conical) | 5 |
| | Nozzle socket G3/8" M 1/8" NPTF | 6 |
| | Nozzle socket D0.63" 1/4" NPTF | 7 |

| Z | Suitable Accessories |
|--------|----------------------|
| 29.001 | |
| 29.006 | |
| 29.001 | |
| 29.006 | |
| 29.007 | |
| 29.007 | |
| 29.010 | |
| 29.010 | |

(larger pictures & descriptions on page 105)

Nozzles see page 104

Legend

M.. = metric thrust, ..M = male, F = female, G = gas pipe thrust, QV = quick connects, SV = profile ring fitting
 D = diameter, k = conical, L = length, NW = nominal width, SW = wrench size, IN = media input, OUT = media output, RS = basic position

WAND WITH FILTER SIEVE



- ✓ quality high pressure wand with integrated filter sieve
- ✓ nozzle guard included
- ✓ connections for: 1/8" NPTF nozzle or G3/8" M ceramic nozzle
- ✓ high quality wands
- ✓ nozzle guard included
- ✓ high quality machining
- ✓ ready to use


Technical Data

| | |
|--------------------------|---------------------|
| Pressure | 4000 psi (27.5 MPa) |
| Temperature | 250°F |
| Nominal width | 1/4" |
| Throughput medium | pH 3 - 12 |



LAS (Wand with filter, hard plastic handle)


| Part No. | L | IN | OUT | Weight |
|----------|-----|-----------|---------------------|---------|
| 28.201 | 10" | 1/4" NPTM | G3/8" M + 1/8" NPTF | 1.0 lbs |
| 28.202 | 14" | 1/4" NPTM | G3/8" M + 1/8" NPTF | 1.0 lbs |
| 28.203 | 20" | 1/4" NPTM | G3/8" M + 1/8" NPTF | 1.1 lbs |
| 28.204 | 26" | 1/4" NPTM | G3/8" M + 1/8" NPTF | 1.1 lbs |
| 28.205 | 30" | 1/4" NPTM | G3/8" M + 1/8" NPTF | 1.3 lbs |
| 28.206 | 34" | 1/4" NPTM | G3/8" M + 1/8" NPTF | 1.3 lbs |
| 28.207 | 38" | 1/4" NPTM | G3/8" M + 1/8" NPTF | 1.5 lbs |
| 28.208 | 41" | 1/4" NPTM | G3/8" M + 1/8" NPTF | 1.5 lbs |
| 28.251 | 10" | 3/8" NPTM | G3/8" M + 1/8" NPTF | 1.0 lbs |
| 28.252 | 14" | 3/8" NPTM | G3/8" M + 1/8" NPTF | 1.0 lbs |
| 28.253 | 20" | 3/8" NPTM | G3/8" M + 1/8" NPTF | 1.1 lbs |
| 28.254 | 26" | 3/8" NPTM | G3/8" M + 1/8" NPTF | 1.3 lbs |
| 28.255 | 30" | 3/8" NPTM | G3/8" M + 1/8" NPTF | 1.3 lbs |
| 28.256 | 34" | 3/8" NPTM | G3/8" M + 1/8" NPTF | 1.3 lbs |
| 28.257 | 38" | 3/8" NPTM | G3/8" M + 1/8" NPTF | 1.5 lbs |
| 28.258 | 41" | 3/8" NPTM | G3/8" M + 1/8" NPTF | 1.5 lbs |
| 28.301 | 10" | 1/4" NPTM | 1/4" NPTF | 1.0 lbs |
| 28.302 | 14" | 1/4" NPTM | 1/4" NPTF | 1.0 lbs |
| 28.303 | 20" | 1/4" NPTM | 1/4" NPTF | 1.1 lbs |
| 28.304 | 26" | 1/4" NPTM | 1/4" NPTF | 1.1 lbs |
| 28.305 | 30" | 1/4" NPTM | 1/4" NPTF | 1.3 lbs |
| 28.306 | 34" | 1/4" NPTM | 1/4" NPTF | 1.3 lbs |
| 28.307 | 38" | 1/4" NPTM | 1/4" NPTF | 1.5 lbs |
| 28.308 | 41" | 1/4" NPTM | 1/4" NPTF | 1.5 lbs |
| 28.351 | 10" | 3/8" NPTM | 1/4" NPTF | 1.0 lbs |
| 28.352 | 14" | 3/8" NPTM | 1/4" NPTF | 1.0 lbs |
| 28.353 | 20" | 3/8" NPTM | 1/4" NPTF | 1.1 lbs |
| 28.354 | 26" | 3/8" NPTM | 1/4" NPTF | 1.3 lbs |
| 28.355 | 30" | 3/8" NPTM | 1/4" NPTF | 1.3 lbs |
| 28.356 | 34" | 3/8" NPTM | 1/4" NPTF | 1.3 lbs |
| 28.357 | 38" | 3/8" NPTM | 1/4" NPTF | 1.5 lbs |
| 28.358 | 41" | 3/8" NPTM | 1/4" NPTF | 1.5 lbs |

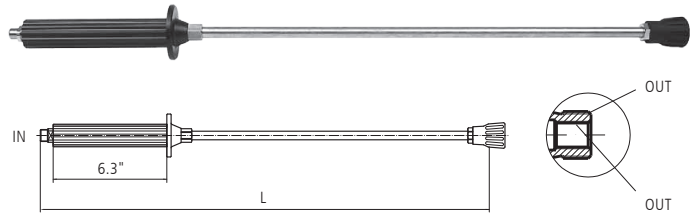

LAH (Wand with filter, PUR - molded soft handle)

| Part No. | L | IN | OUT | Weight |
|----------|-----|---------|---------------------|---------|
| 28.404 | 26" | G3/8" F | G3/8" M + 1/8" NPTF | 1.1 lbs |
| 28.414 | 26" | G3/8" F | G3/8" M + 1/4" NPTF | 1.1 lbs |
| 28.405 | 30" | G3/8" F | G3/8" M + 1/8" NPTF | 1.1 lbs |
| 28.415 | 30" | G3/8" F | G3/8" M + 1/4" NPTF | 1.1 lbs |

100 pieces or more available with red or blue handles.

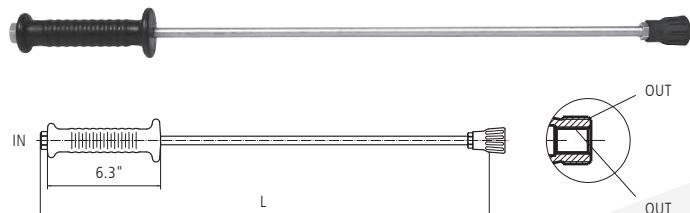

Appropriate nozzles see page 104

Accessories & Spare Parts see page 105

Legend

M.. = metric thrust, **..M** = male, **F** = female, **G** = gas pipe thrust, **QV** = quick connects, **SV** = profile ring fitting
D = diameter, **k** = conical, **L** = length, **NW** = nominal width, **SW** = wrench size, **IN** = media input, **OUT** = media output, **RS** = basic position